



RGW-560IIS

Product Strap Banding Machine with Scale



Searching for a New Balance

Specifications/Dimensions

Banding

Package size Width: 50-240mm(2.0-9.4 inches)
Height: 10-150mm(0.4-5.9 inches)
Depth: 80mm or more (3.1 inches or more)

Banding speed Max: 12 packages/min.
Note: The banding speed may vary depending on the length of the band format.

Printer

Banding film type OPP
Printing method Thermal transfer
Dot density 11.8dot/mm(300dpi)
Film width 60mm
Printing area Max. 300mm (Between 95mm to 395mm from top of banding label)


Operation console

Display panel TFT LCD color (10.4 inches) touch panel
Operation keys Mechanical keys and touch panel
Memory for programmable files 18GB

General

Power source and AC 100-120 or 220-240V, 50/60Hz
power consumption 280W
Net weight • RGW-560II Approx. 41.4kg
• Scale platform 3.8kg
Operation humidity 40 to 80%RH with no condensation

Interval type	Multi-interval	
Capacity	Max. 3/6kg	Max. 6/15kg
Scale interval	e=1/2g	e=2/5g
Weighing range	20g-6kg	40g-15kg

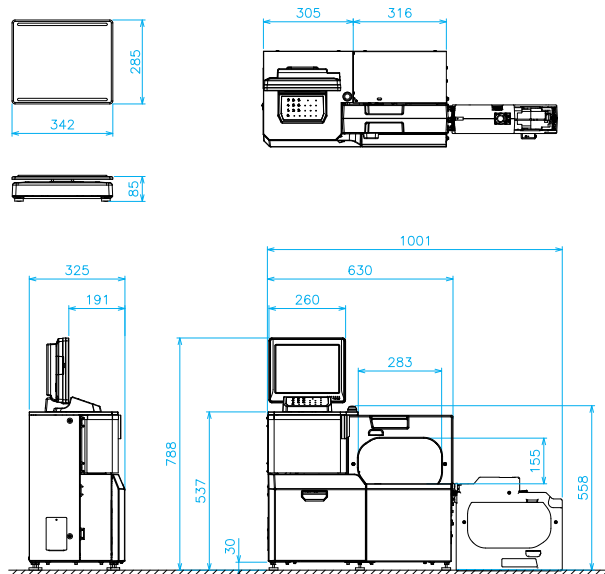

Easy to operate

Step 1



Step 2




Package Sample



*Specifications are subject to change without prior notice.

TERAOKA SEIKO Co., Ltd.

13-12 Kugahara 5-chome, Ohta-ku,
Tokyo 146-8580 JAPAN
www.digisystem.com



Scanvaegt Systems A/S

Stærmosegårdsvej 2, 5230 Odense M, Danmark
detail@scanvaegt.dk, Tel. +45 8678 5500
detail.scanvaegt.dk

A2107WD