

▪ Web Quole IPT200 (15") Basic Specifications

Specifications	Description
Processor Type	Intel 1.6GHz (x 86 architecture, Atom)
Operating System Supported	Windows POSReady (bundled)
Driver Supported	OPOS drivers
Memory storage	SODIMM DDRAM 2 (1GB standard, 2GB as option) 2.5" HDD 160G (SATA)
Interfaces	2 x Ethernet 1 x Cash drawer port (24V) 4 x USB V2.0 1 x CRT port 3 x RS232C (one with power)
Display	
Operator Display	15" TFT XGA touch panel
Touch Panel	4 wires Resistive type Enhanced with water resistant protection and easy wash feature
Customer Display (built in)	VFD Fluorescent display 20 characters x 2 lines (5x 7 dots)
Printer (built in)	Seiko Sii CAPD347 with auto-cutter Print speed: up to 150mm/s Print width 72mm Receipt paper type: Thermal with 80mm width, roll diameter max 80mm
Card Reader (built in)	ISO7811 compliance
Power management	ATX power supply
Standard compliance	
Safety compliance	EN60950 & UL/CSA NRTL, Japan PSE
EMC Standards	EMS-IEC 61000-4-x Level 3 Criteria A EMI-CISPR22-A

▪ Key Features



Sleek Design

Makes it easy to blend into any bakery, retail or restaurant environment



Wide Touch Display

15" touch display enable easy viewing and entry of orders, thus reducing human errors



Built in Printer


Simple loading design makes receipt roll replacement easy which reduces down time



Bright Customer Fluorescent Display

Enhances communication between cashier and customer

▪ External Dimensions

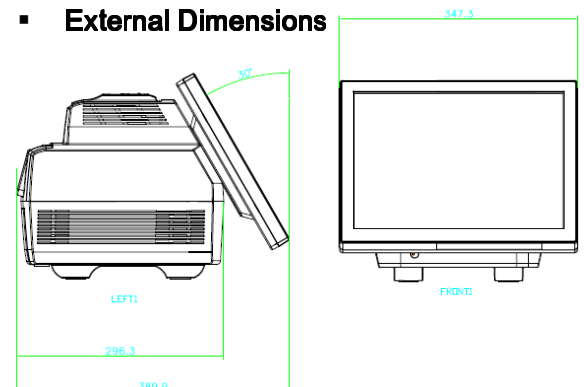

Specifications are subjected to change without prior notifications

TERAOKA WEIGH-SYSTEM PTE LTD.

4 Leng Kee Road, #05-02/03/04/05 & 11
SIS Building, SINGAPORE 159088
TEL: +65-6472-2996
SALES: +65-6378-5383
FAX: +65-6863-4614
URL: <http://www.digi-delious.com/>
EMAIL: bdd@teraoka.com.sg

TERAOKA SEIKO CO. LTD.

13-12 Kugahara 5-chome, Ohta-ku,
Tokyo 146-8580, JAPAN
TEL: +81-3-3752-2131
FAX: +81-3-3752-2801
URL: <http://www.digisystem.com>
EMAIL: info@hq.digi.co.jp